



HOBD682R1

Hob, Aesthetics: Dolce Stil Novo, Induction with integrated hood, 80 cm, Black, Built-in type: Traditional



MULTIZONE

The Multizone function guarantees infinite possibilities and maximum flexibility of use




AUTOPOT DETECTION

The hob detects the presence of the pots automatically and permanently, starting from a diameter of 9 cm




AUTO VENT

The connected hood will automatically activate based on the power settings detected by the hob



FILTER KIT

As an accessory, the top is equipped with a filter kit, ceramic filter and removable 6 cm stainless steel grid

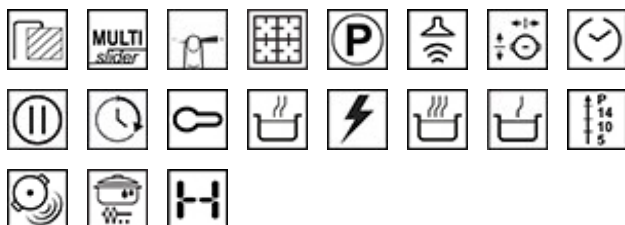

TYPE

Product Family: Hob • Dimensions: 80 cm • Type: Induction with integrated hood • Extraction: Extraction • Built-in type: Traditional • Power supply: Electric • Electronic control: Yes • EAN code: 8017709298692

AESTHETICS

Colour: Black • Finishing: Glass • Aesthetics: Dolce Stil Novo • Material: Glass • Glass type: Ceramic • Type of control setting: Multi Slider • Control knob position: Front • Slider: Yes • Glass edge: Straight edge • Frame: Yes • Frame colour: Copper • Pan stands: Cast iron • Serigraphy colour: Grey

PROGRAMME / FUNCTIONS

Total no. of cook zones: 2 • No. of induction cook zones: 4 • Time-setting options: Spegnimento automatico • No. of cooking zones with booster: 4 • No. of Flexible zones: 2 • Main on/off switch: Yes • Power levels: 9 • Auto-Vent: Yes

OPTIONS

Worktop Cut-Out: 482-483x763-764 mm • Multizone Option: Yes • Flexible Zone Type: MultiZone • End cooking timer: 4 • Pause option: Yes • Minute minder: 1 • End of cooking alarm: Yes • Residual time indicator: Yes • Control Lock / Child Safety: Yes • Keep warm automatic function: Yes • Quick start: Yes • Simmering Function: Yes • Melting/Low temperature cooking function: Yes • Rapid level selection: Yes

COOKING ZONES

1st zone position: Left • 2nd zone position: Right • 1st zone type: Induction - Multizone • 2nd zone type: Induction - Multizone • 1st zone dimensions: 23.0x21.0 cm • 2nd zone dimensions: 23.0x21.0 cm • 3rd zone dimensions: 23.0x21.0 cm • 4th zone dimensions: 23.0x21.0 cm • Left Multizone dimension: 46.0x21.0 cm • Right Multizone dimension: 46.0x21.0 cm • 1st zone power: 2.10 kW • 2nd zone power: 2.10 kW • 3rd zone power: 2.10 kW • 4th zone power: 2.10 kW • 1st zone booster power: 3.70 kW • 2nd zone booster power: 3.70 kW • 3rd zone booster power: 3.70 kW • 4th zone booster power: 3.70 kW • Booster power left Multizone: 3.70 kW • Booster power right Multizone: 3.70 kW

TECHNICAL FEATURES

Automatic setting according to pan dimension: Yes • Permanent Automatic Pot Detection with indication of the relative control: Yes • pan detection: Yes • Automatic switch off when overflow: Yes • Residual heat indicator: Yes • Protection against accidental start up: Yes

PERFORMANCE / ENERGY LABEL

Annual Efficiency Consumption (AEC_{hood}): 25 kWh/a • 2nd zone energy consumption: 194.0 Wh/Kg

ELECTRICAL CONNECTION

Electrical connection rating (W): 7545 W • Voltage (V): 220-240 V • Voltage 2 (V): 380-415 V • Frequency (Hz): 50/60 Hz • Type of electric cable: Universal • Power supply cable length: 120 cm

PRINTED DOCUMENTS

ALSO AVAILABLE

CONTROLS (HOOD)

Hood control setting: Touch Capacitive • Led color: Bianco • Display: Yes

PROGRAMS / FUNCTIONS (HOOD)

No. of speeds: 8 • Intensive speed: 2 • Other functions: AUTOVENT • Auto-Vent: Yes

TECHNICAL FEATURES (HOOD)

Free outlet maximum capacity: 750 m³/h • Motor power: 220 W • No. of filters: 1 • Anti-grease filters: Alluminio • Filter replacement indicator: Yes

SPEED 1

Extraction rate IEC 61591: 245 m³/h • Noise level IEC 60704-2-13: 51 dB(A) • Power: 35 W

SPEED 2

Extraction rate IEC 61591: 285 m³/h • Noise level IEC 60704-2-13: 55 dB(A) • Power: 45 W

SPEED 3

Extraction rate IEC 61591: 350 m³/h • Noise level IEC 60704-2-13: 57 dB(A) • Power: 60 W

SPEED 4

Extraction rate IEC 61591: 380 m³/h • Noise level IEC 60704-2-13: 59 dB(A) • Power: 75 W

SPEED 5

Extraction rate IEC 61591: 410 m³/h • Noise level IEC 60704-2-13: 62 dB(A) • Pressure: 535 Pa • Power: 85 W

SPEED 6

Extraction rate IEC 61591: 445 m³/h • Noise level IEC 60704-2-13: 63 dB(A) • Pressure: 540 Pa • Power: 105 W

SPEED 7

Extraction rate IEC 61591: 475 m³/h • Noise level IEC 60704-2-13: 64 dB(A) • Pressure: 545 Pa • Power: 115 W

SPEED 8

Extraction rate IEC 61591: 505 m³/h • Noise level IEC 60704-2-13: 65 dB(A) • Pressure: 550 Pa • Power: 125 W

INTENSIVE SPEED

Extraction rate (IEC 61591): 550 m³/h • Noise level IEC 60704-2-13: 66 dB(A) • Power: 110 W

INTENSIVE SPEED 2

Extraction rate IEC 61591: 700 m³/h • Noise level IEC 60704-2-13: 72 dB(A) • Pressure: 560 Pa • Power: 140 W

PERFORMANCE / ENERGY LABEL (HOOD)

Energy efficiency class (EEC): A+++ • Fluid Dynamic Efficiency class (FDEC): A • Grease Filtering Efficiency Class (GFEC): B • Lighting Efficiency Class (LEC): NA • Fluid Dynamic Efficiency (FDE): 40.30 • Lighting Efficiency (LE): 0.0 lux/W • Grease Filtering Efficiency (GFE): 85.1 % • Air flow at minimum speed (Qmin): 245 m³/h • Air flow at maximum speed (Qmax): 505 m³/h • Air flow at boost speed (Qboost): 700 m³/h • Airborne acoustical A-weighted sound Power Emission at minimum speed (SPEmin): 51 dB(A) • Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax): 65 dB(A) • Airborne acoustical A-weighted sound power emission at boost speed (SPEboost): 72 dB(A) • Power Consumption in Off mode (Po): 0.49 W • Time increase factor (F): 0.5 • Energy Efficiency Index: 27.5 • Measured air flow rate at best efficiency point (Qbep): 359 m³/h • Measured air pressure at best efficiency point (Pbep): 549 Pa • Measured electric power input at best efficiency point (Wbep): 136 W • Sound power level at highest setting (Lwa): 65 dB(A)

ELECTRICAL CONNECTIONS (HOOD)

Frequenza cappa: 50-60 Hz

LOGISTIC INFORMATION

Dimensions of the product (mm): 210x830x520 • Depth: 520 mm • Width: 830 mm • Product Height: 210 mm • Net weight (kg): 19.000 kg • Gross weight (kg): 26.000 kg

OPTIONAL

KITEHOBD4: Recirculating kit, Hobs, HoodsKITEHOBD: Exhaust kit, HobsKITF6HOBD: Recirculating kit, HobsFLTHOBD: Ceramic Filter, HobsTPK: Teppanyaki grill, HobsCON60H: Pan stands, HoodsGRI60H: Pan stands, Hoods

