


## KSCB90WHE

Hood, Ceiling hood, Universale, White, 90 cm, A+

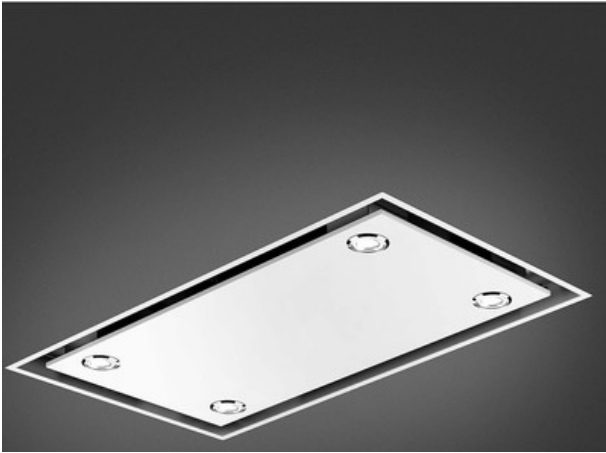

### TYPE

Product family: Hood • Hood Type: Ceiling hood • Hood width: 90 cm • Extraction: Extraction • Electronic control: Yes • Perimeter extraction: Yes • EAN code: 8017709279271

### AESTHETICS

Colour: White • Aesthetics: Universale • Design: Ceiling • Material: Stainless Steel + Painted Material • Type of steel: Brushed

### PROGRAMME / FUNCTIONS

No. of speeds: 3 • Intensive speed: Yes

### CONTROLS

Control setting: Electronic buttons

### TECHNICAL FEATURES

No. of lights: 4 • Light type: LED • Light Power: 1 W • Light color temperature scale (°K): 3000 °K • Free outlet maximum capacity: 820 m<sup>3</sup>/h • Motor power: 275 W • No. of filters: 2 • Anti-grease filters: Stainless steel • Minimum distance from GAS hob: 750 mm • Vent outlet: 150 mm • Minimum distance from ELECTRIC hob: 650 mm • Non return valve: Yes

## PERFORMANCE / ENERGY LABEL

Energy efficiency class (EEC): A+ • Fluid Dynamic Efficiency class (FDEC): A • Grease Filtering Efficiency Class (GFEC): F • Lighting Efficiency Class (LEC): A • Annual Efficiency Consumption (AEC<sub>hood</sub>): 43 kWh/a • Fluid Dynamic Efficiency (FDE): 35.1 • Lighting Efficiency (LE): 76.1 lux/W • Grease Filtering Efficiency (GFE): 54.1 % • Air flow at minimum speed (Q<sub>min</sub>): 232 m<sup>3</sup>/h • Air flow at maximum speed (Q<sub>max</sub>): 589 m<sup>3</sup>/h • Air flow at boost speed (Q<sub>boost</sub>): 792 m<sup>3</sup>/h • Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE<sub>min</sub>): 46 dB(A) • Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE<sub>max</sub>): 68 dB(A) • Airborne acoustical A-weighted sound power emission at boost speed (SPE<sub>boost</sub>): 71 dB(A) • Power consumption in stand-by mode (P<sub>s</sub>): 0.41 W • Time increase factor (F): 0.7 • Energy Efficiency Index: 41.6 • Measured air flow rate at best efficiency point (Q<sub>bep</sub>): 399 m<sup>3</sup>/h • Measured air pressure at best efficiency point (P<sub>bep</sub>): 486 Pa • Measured electric power input at best efficiency point (W<sub>bep</sub>): 154 W • Nominal Power consumption of the light system (WL): 4 W • Average illumination of the light on the cooking surface (E<sub>middle</sub>): 353 lux • Sound power level at highest setting (L<sub>wa</sub>): 68 dB(A)

## ELECTRICAL CONNECTION

Electrical connection rating: 280 W • Voltage: 220-240 V • Frequency (Hz): 50-60 Hz • Power supply cable length: 1500 mm

## OPTIONAL ACCESSORIES

### SPEED 1

Extraction rate IEC 61591: 232 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 47 dB(A) • Power: 182 W

### SPEED 2

Extraction rate IEC 61591: 428 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 58 dB(A) • Power: 199 W

### SPEED 3

Extraction rate IEC 61591: 589 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 69 dB(A) • Power: 214 W

### SPEED 4

### INTENSIVE SPEED

Extraction rate (IEC 61591): 792 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 72 dB(A) • Power: 270 W

## LOGISTIC INFORMATION

Dimensions of the product (mm): 295x901x499 • Width: 901 mm • Depth (mm): 499 mm • Product Height (mm): 295 mm • Net weight (kg): 16.000 kg • Gross weight (kg): 21.500 kg

## ACCESSORIES INCLUDED

Remote control: Yes

OPTIONAL

KITALLFC: Charcoal filter, HoodsFLT6: Charcoal filter, Hoods

