


KSGT63X

Hood, Integrated hood, Universale, Stainless steel, 60 cm, A

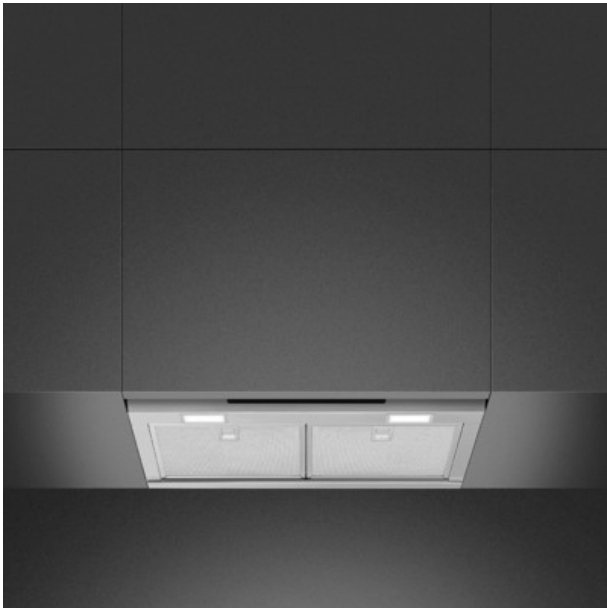

TYPE

Product family: Hood • Hood Type: Integrated hood • Hood width: 60 cm • Extraction: Extraction • Electronic control: Yes • EAN code: 8017709312138

AESTHETICS

Colour: Stainless steel • Finishing: Satin • Aesthetics: Universale • Design: Fully integrated • Material: Stainless steel • Type of steel: Brushed

PROGRAMME / FUNCTIONS

No. of speeds: 3 • Intensive speed: Yes • 24h air filter function: Yes • Time-setting options: Automatic switch-off

CONTROLS

Control setting: Touch control back-lighted White • Led color: White

TECHNICAL FEATURES

No. of lights: 2 • Light type: LED • Light Power: 1,3 W • Dimmer mode: Yes • Light color temperature scale (°K): 4000 °K • Free outlet maximum capacity: 730 m³/h • Motor power: 230 W • No. of filters: 2 • Anti-grease filters: Aluminium • Filter replacement indicator: Yes • Minimum distance from GAS hob: 650 mm • Minimum distance from ELECTRIC hob: 500 mm • Vent outlet: 150 mm • Non return valve: Yes

PERFORMANCE / ENERGY LABEL

Energy efficiency class (EEC): A • Fluid Dynamic Efficiency class (FDEC): A • Grease Filtering Efficiency Class (GFEC): C • Lighting Efficiency Class (LEC): A • Annual Efficiency Consumption (AEC_{hood}): 53 kWh/a • Fluid Dynamic Efficiency (FDE): 31.3 • Lighting Efficiency (LE): 75.0 lux/W • Grease Filtering Efficiency (GFE): 84.9 % • Air flow at minimum speed (Q_{min}): 270 m³/h • Air flow at maximum speed (Q_{max}): 482 m³/h • Air flow at boost speed (Q_{boost}): 716 m³/h • Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE_{min}): 47 dB(A) • Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE_{max}): 62 dB(A) • Airborne acoustical A-weighted sound power emission at boost speed (SPE_{boost}): 70 dB(A) • Power consumption in stand-by mode (P_s): 0.49 W • Time increase factor (F): 0.9 • Energy Efficiency Index: 51.7 • Measured air flow rate at best efficiency point (Q_{bep}): 388 m³/h • Measured air pressure at best efficiency point (P_{bep}): 450 Pa • Measured electric power input at best efficiency point (W_{bep}): 155 W • Nominal Power consumption of the light system (WL): 3 W • Average illumination of the light on the cooking surface (E_{middle}): 195 lux • Sound power level at highest setting (L_{wa}): 62 dB(A)

ELECTRICAL CONNECTION

Electrical connection rating: 233 W • Voltage: 220-240 V • Frequency (Hz): 50-60 Hz • Power supply cable length: 1500 mm

OPTIONAL ACCESSORIES

SPEED 1

Extraction rate IEC 61591: 265 m³/h • Noise level IEC 60704-2-13: 47 dB(A) • Power: 138 W

SPEED 2

Extraction rate IEC 61591: 365 m³/h • Noise level IEC 60704-2-13: 54 dB(A) • Power: 161 W

SPEED 3

Extraction rate IEC 61591: 482 m³/h • Noise level IEC 60704-2-13: 61 dB(A) • Power: 189 W

SPEED 4

INTENSIVE SPEED

Extraction rate (IEC 61591): 716 m³/h • Noise level IEC 60704-2-13: 70 dB(A) • Power: 234 W

LOGISTIC INFORMATION

Dimensions of the product (mm): 361x562x290 • Width: 562 mm • Depth (mm): 290 mm • Product Height (mm): 361 mm • Net weight (kg): 8.400 kg • Gross weight (kg): 11.840 kg

OPTIONAL

KITALLFC: Charcoal filter, HoodsFLT6: Charcoal filter, Hoods

