


## KSVV90NRA

Hood, Decorative wall hood, Dolce Stil Novo, Black, 90 cm, A

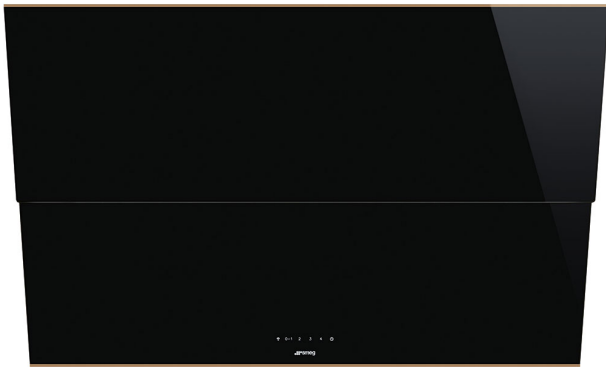

### TYPE

Hood width: 90 cm • Product family: Hood • Extraction: Extraction • EAN code: 8017709226169 • Hood Type: Decorative wall hood • Perimeter extraction: Yes • Electronic control: Yes

### AESTHETICS

Aesthetics: Dolce Stil Novo • Design: Angled • Components finishing: Copper • Glass Type: Black • Colour: Black • Finishing: Glass • Material: Glass

### CONTROLS

Control setting: Touch control • Led color: Ice

### PROGRAMS / FUNCTIONS

No. of speeds: 3 • Intensive speed: Yes • Time-setting options: Automatic switch-off

### TECHNICAL FEATURES

Light color temperature scale (°K): 4000 °K • Anti-grease filters: Stainless steel • Light Power: 1 W • Charcoal filters included: Yes • Minimum distance from GAS hob: 600 mm • Non return valve: Yes • No. of filters: 2 • No. of lights: 2 • Free outlet maximum capacity: 830 m<sup>3</sup>/h • Motor power: 280 W • Light type: LED • Vent outlet: 150 mm • Minimum distance from ELECTRIC hob: 550 mm

## PERFORMANCE / ENERGY LABEL

Air flow at minimum speed (Qmin): 345 m<sup>3</sup>/h • Average illumination of the light on the cooking surface (Emiddle): 250 lux • Fluid Dynamic Efficiency class (FDEC): A • Power consumption in stand-by mode (Ps): 1.00 W • Energy efficiency class (EEC): A • Time increase factor (F): 1.00 • Airborne acoustical A-weighted sound power emission at boost speed (SPEboost): 68 dB(A) • Sound power level at highest setting (Lwa): 61 dB(A) • Air flow at maximum speed (Qmax): 600 m<sup>3</sup>/h • Measured air flow rate at best efficiency point (Qbep): 397 m<sup>3</sup>/h • Fluid Dynamic Efficiency (FDE): 29.9 • Annual Efficiency Consumption (AEChood): 54 kWh/a • Grease Filtering Efficiency (GFE): 77 % • Grease Filtering Efficiency Class (GFEC): C • Measured air pressure at best efficiency point (Pbep): 431 Pa • Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax): 61 dB(A) • Nominal Power consumption of the light system (WL): 2 W • Air flow at boost speed (Qboost): 770 m<sup>3</sup>/h • Lighting Efficiency Class (LEC): A • Lighting Efficiency (LE): 104 lux/W • Energy Efficiency Index: 51.9 • Measured electric power input at best efficiency point (Wbep): 159 W • Airborne acoustical A-weighted sound Power Emission at minimum speed (SPEmin): 48 dB(A)

## ELECTRICAL CONNECTION

Voltage: 220-240 V • Frequency (Hz): 50-60 Hz • Electrical connection rating: 283 W

## SPEED 1

Power: 197 W • Noise level IEC 60704-2-13: 48 dB(A) • Extraction rate IEC 61591: 345 m<sup>3</sup>/h

## SPEED 2

Power: 229 W • Noise level IEC 60704-2-13: 55 dB(A) • Extraction rate IEC 61591: 460 m<sup>3</sup>/h

## SPEED 3

Power: 254 W • Extraction rate IEC 61591: 600 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 61 dB(A)

## INTENSIVE SPEED

Extraction rate (IEC 61591): 770 m<sup>3</sup>/h • Noise level IEC 60704-2-13: 68 dB(A) • Power: 266 W

## LOGISTIC INFORMATION

Dimensions of the product (mm): 450x900x430 • Width: 900 mm • Depth (mm): 430 mm • Product Height (mm): 450 mm

## OPTIONAL

FLT6: Charcoal filter, HoodsKITALLFC: Charcoal filter, HoodsKITCMNDSBL: Chimney set, Hoods

